

B065

Image Courtesy of Tom Feiza – Mr. Fix-it Inc.

What do you do with the excess water?

- Divert excess water to the storm sewer or roadside ditch.
- Divert excess water to rain gardens or an infiltration basin.
- Harvest water using rain barrels and re-use for non-potable uses such as irrigation or car washing.

For Additional Information Please Visit

Milwaukee Metropolitan Sewage District
www.mmsd.com

UW-Extension's Website
<http://clean-water.uwex.edu/pubs/>

City of Mequon Engineering Department

For More Information

Further information can be found on the City's website or by contacting the Deputy Director of Utilities Kevin Driscoll.

Contact Information

Phone: 262-236-2937

Email: kdriscoll@ci.mequon.wi.us

Web: www.ci.mequon.wi.us, click on the Departments tab and scroll down to Engineering Department. Additional information is contained in the sidebar on the Engineering Department webpage.

To Report a Drainage Complaint Contact

John Westbrooke, Engineering Tech

Phone: 262-236-2936

Email: jwestbrooke@ci.mequon.wi.us



CITY OF MEQUON

*Improving drainage
& preventing your
basement from
flooding*

Resident Informational Brochure




CITY OF MEQUON

11333 N. Cedarburg Rd.

Mequon, WI 53902

Originally Published: March 2015

Revised: May 2020

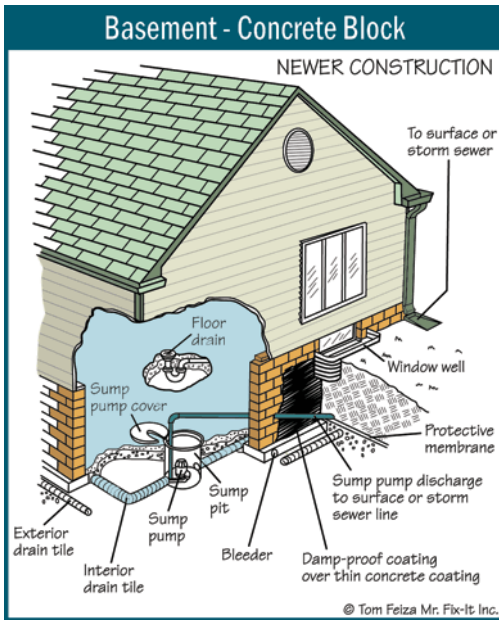

B005

Image Courtesy of Tom Feiza – Mr. Fix-it Inc.

What to do when storm water enters your basement?

1. CAUTION! If the water is deep do not enter the basement until the water has been pumped out or the electricity is off.
2. Remove the water from your basement and begin cleanup. Storm water may contain bacteria and pathogens; residents may consider hiring a professional cleaning service that specializes in this type of cleanup. If you have a sanitary sewer connection the water may also be mixed with sewage.
3. Determine the cause of the drainage problem.

What can you do to prevent storm water in your basement?

Check your gutters and downspouts-

Clean your gutters and downspouts on a regular basis to clear them of leaves, dirt, and debris. Plugged gutters and leaking downspouts can cause water to run down your walls and enter your basement. Downspouts should be checked for any leaks and downspouts should be extended 6 feet away from the foundation to an area where the water will flow away naturally.

Make sure water flows freely to ditches, road or storm sewer -


The soil around your foundation should be pitched away from the house for at least the first six feet. It is recommended that proper grading achieves a six-inch pitch over the course of six feet. Keep drainage ways on your property and directly adjacent to your property free of debris.

Check driveway culvert pipes and storm sewer grates. CAUTION!! Please do not attempt to unclog large culverts or catch basins yourself.

Contact the City Highway Department at 262-239-2913 if there is blockage. Your driveway culvert or corner catch basin may get plugged with debris. Using a rake to remove debris from your driveway culvert can keep water flowing.

Reduce impervious surfaces or improve drainage -

Consider reconstructing poorly pitched patios, driveways, sidewalks and decks. Consider using permeable material to help absorb some of the water.

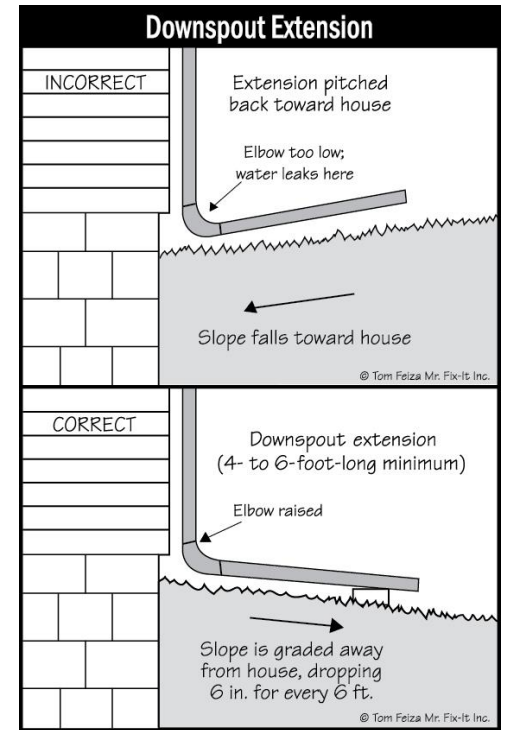

B086

Image Courtesy of Tom Feiza – Mr. Fix-it Inc.

Prevention (cont.)

Basement Windows – Consider installing covers over your window wells and/or replacing windows with glass block.

Make sure that your sump pump is functioning and directed away from your foundation –

Check your sump pump and sump pit once a year and make sure that both are free of debris and functioning properly. Make sure that your discharge pipe is far enough away from your foundation and that the discharge location conforms to Mequon's plumbing code. Contact City Hall for more information.

